

Last modified: 20/10/2021 17:29:11

Assembly - Trailer Hitch (Remove and Replace)




Correction code 12300202
FRT 0.70


- NOTE:** Unless otherwise explicitly stated in the procedure, the above correction code and FRT reflect all of the work required to perform this procedure, including the linked procedures. **Do not stack correction codes unless explicitly told to do so.**
- NOTE:** See [Flat Rate Times](#) to learn more about FRTs and how they are created. To provide feedback on FRT values, email LaborTimeFeedback@tesla.com.
- NOTE:** See [Personal Protection](#) to make sure wearing proper PPE when performing the below procedure.


Torque Specifications

Table 1. Torque Specifications: [Assembly - Trailer Hitch \(Remove and Replace\)](#)


Description	Torque Value	Recommended Tools	Reuse/Replace	Notes
Trailer hitch assembly to body studs	 62.5 Nm (46.1 ft-lbs)	<ul style="list-style-type: none">• 15 mm, 6-point deep socket• 6 in extension	Reuse	

Remove

1. Remove the rear fascia. See [Fascia - Rear \(Remove and Install\)](#) .
2. Disconnect the trailer hitch assembly electrical connector.

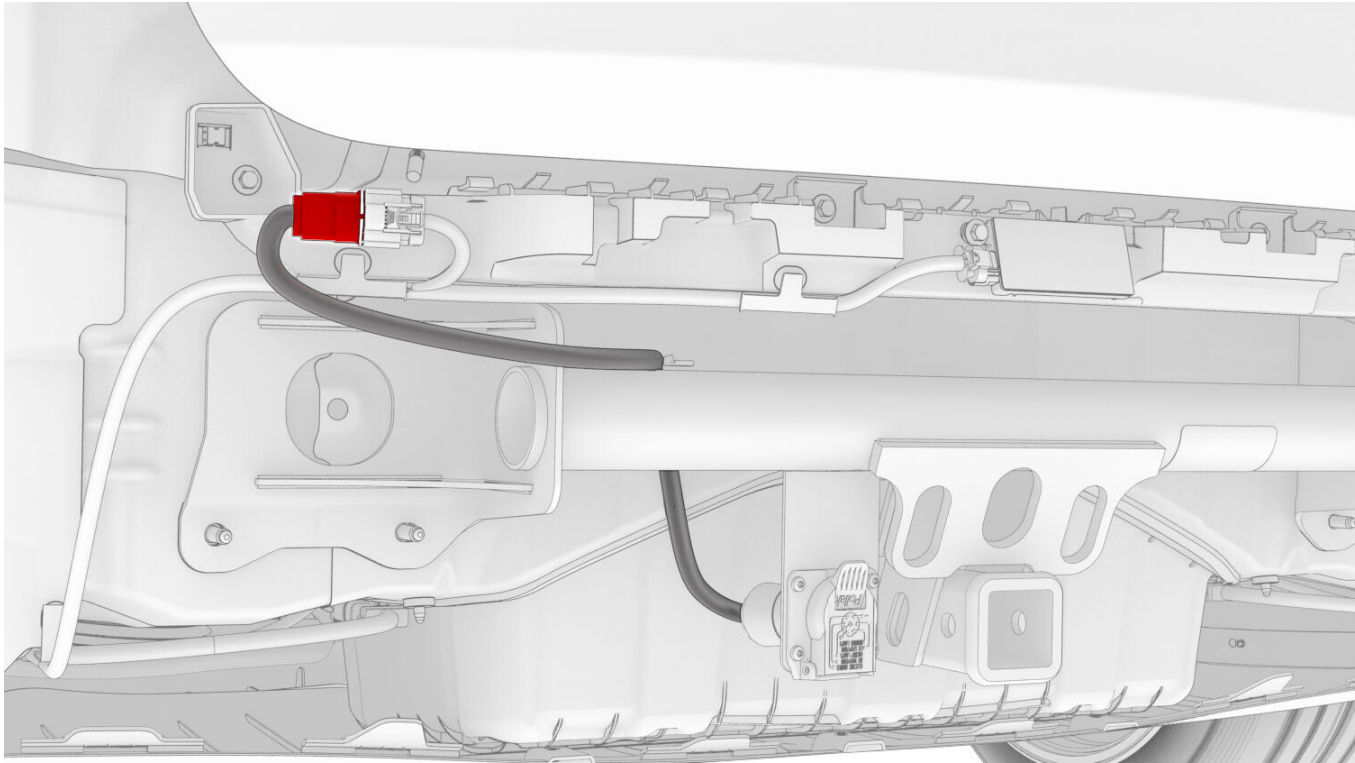

3. Remove the LH nuts (x3) and RH nuts (x3) that attach the trailer hitch assembly to the studs on the body of the vehicle.
- Tip: Use of the following tool(s) is recommended:
- 15 mm, 6-point deep socket
 - 6 in extension

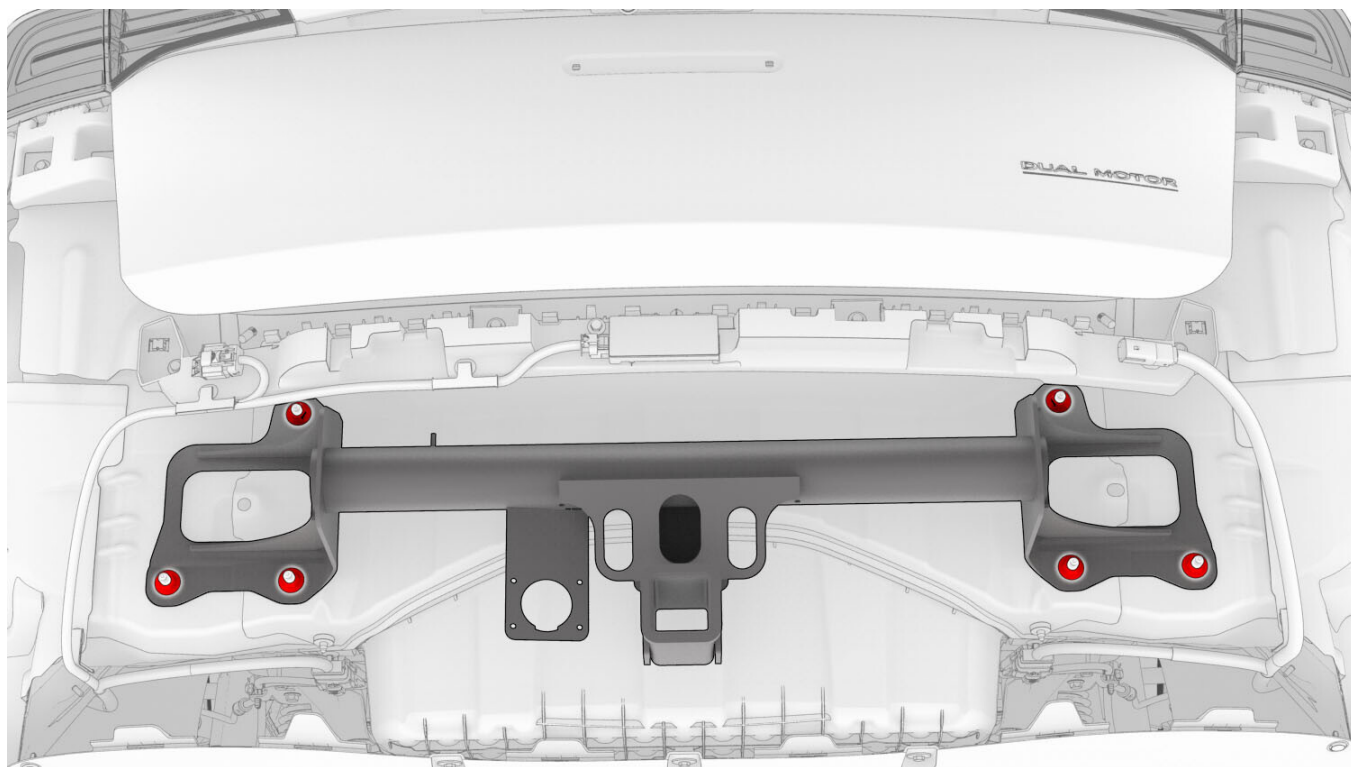

4. Remove the trailer hitch assembly from the vehicle.

Tip: Recommend assistance when performing this step.

Install

1. Maneuver the trailer hitch assembly in place so that the holes are placed over the studs on the body of the vehicle.

Tip: Recommend assistance when performing this step.


2. Install the LH nuts (x3) and RH nuts (x3) that attach the trailer hitch assembly to the studs on the body of the vehicle.




62.5 Nm (46.1 ft-lbs)

Tip: Use of the following tool(s) is recommended:

- 15 mm, 6-point deep socket
- 6 in extension

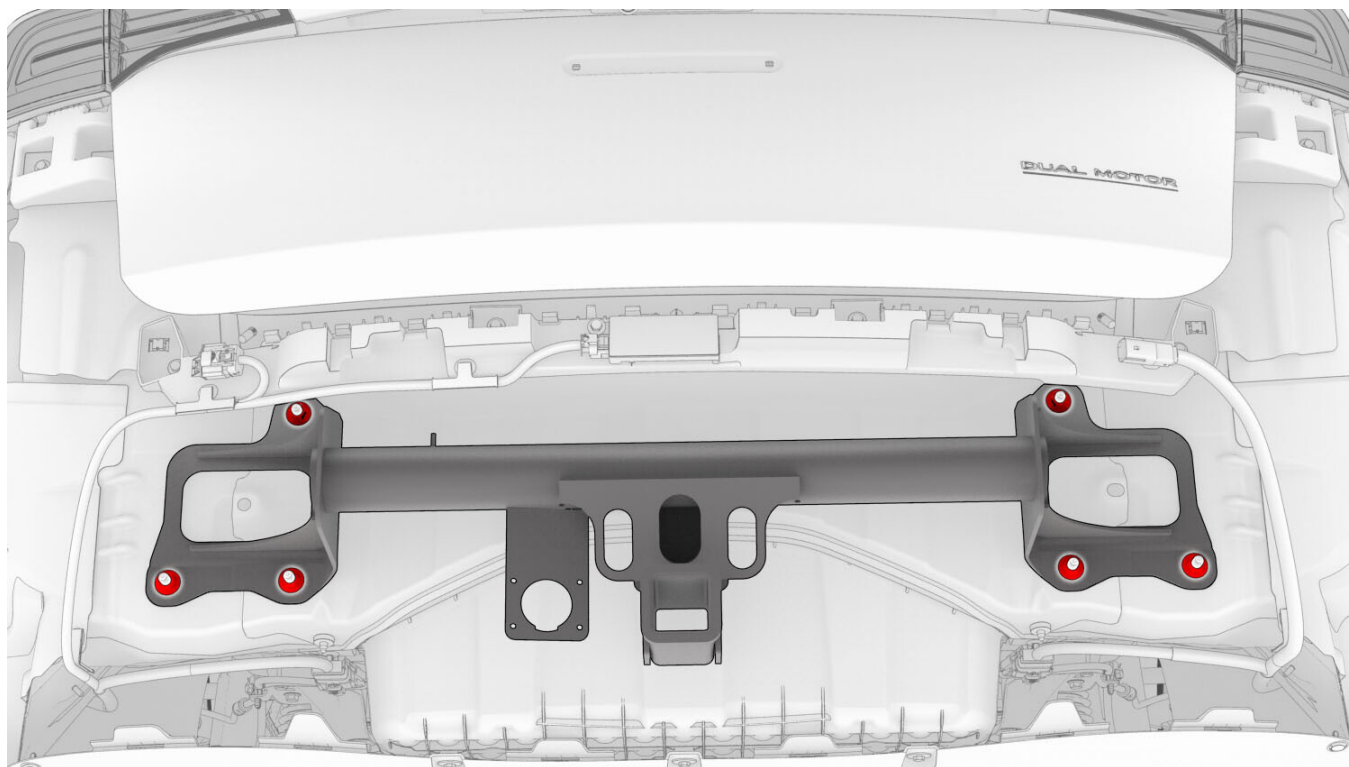

3. Connect the trailer hitch assembly electrical connector.

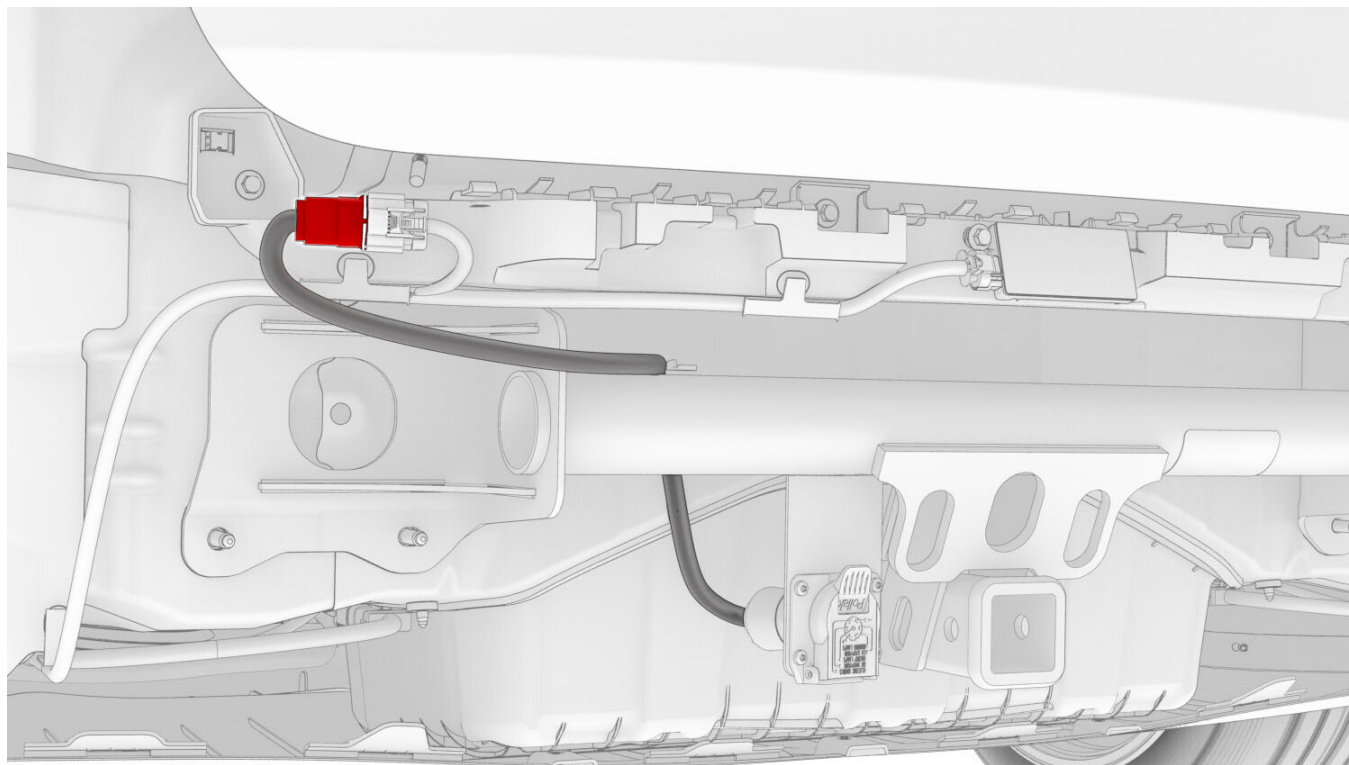

4. Install the rear fascia. See [Fascia - Rear \(Remove and Install\)](#) ○ .