


# Drop In Center Console Assembly (Remove and Replace)

FRT No: 15192602

## Removal


1. Move the front seats to their rearmost positions to allow for additional access.
2. Unplug the phone adaptor cable from the USB connector, if installed.

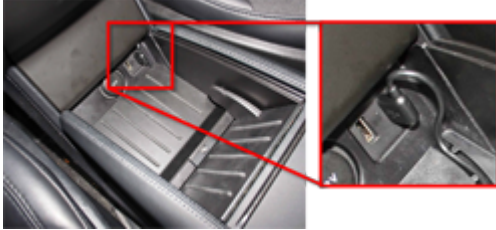


3. Pull the two panels off from the sides of the center console.



**Caution:** Replace any broken clips.

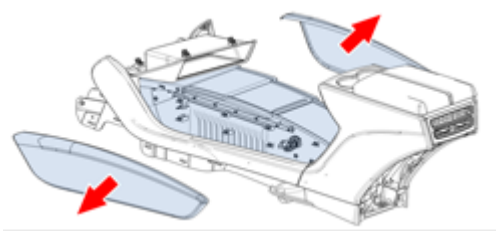

4. Loosen the button head screw on each side of the console. Do not remove the screws completely.

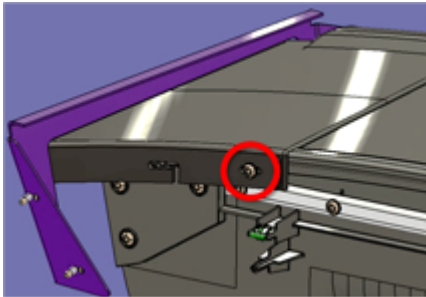

5. Remove the screws (x2) that secure the center console to the carrier.



6. Lift the rear of the center console up, then remove it from the carrier.



**Caution:** Do not damage the arm rest while pulling the center console out of the carrier.



7. If the mounting bracket needs to be removed, release the screws (x4) that secure it to the carrier and remove the mounting bracket.



## Installation

Installation procedure is the reverse of removal.