




## Jacking and Lifting

### Jacking Procedure

Follow the steps below to lift Model 3. Ensure that any non-Tesla repair facility is aware of these lifting points.


1. Position Model 3 centrally between the lift posts.
2. Position the lift arm pads under the designated body lift points at the locations shown.

 **Warning:** DO NOT position the lift arm pads under the Battery or side rails, as shown in red.

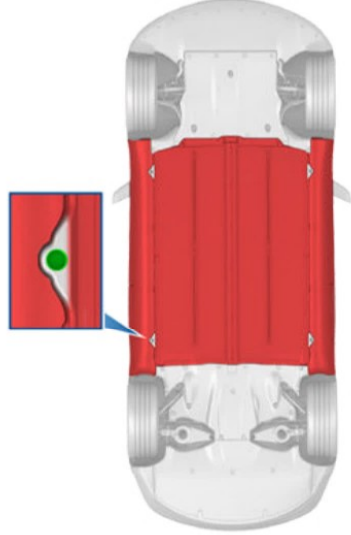


3. Adjust the height and position of the lift arm pads to ensure that they are correctly located.

4. With assistance, raise the lift, ensuring the lift arm pads remain in their correct positions.

 **Warning:** Never raise Model 3 when the charge cable is connected, even if charging is not in progress.

 **Warning:** Do not work on an incorrectly supported vehicle. Doing so can cause serious damage, bodily injury, or death.

 **Caution:** DO NOT lift from under the Battery. Place the lift arm pads under the designated body lift points only. The locations shown are the only approved lifting points for Model 3. Lifting at any other points can cause damage. Damage caused by incorrectly lifting Model 3 is not covered by the warranty.

**Warning: Use these pucks to jack up the vehicle.  
Place pucks between jack and designated jack points.  
Failure to do so may damage the battery pack!**

